


Features

- ◆ Low profile package
- ◆ Built-in strain relief
- ◆ Low inductance
- ◆ Excellent clamping capability
- ◆ Glassed passivated junction
- ◆ Typical I_R less than 1uA above 10V
- ◆ Repetition rate (duty cycle):0.01%
- ◆ Fast response time: typically less than 1.0ps from 0V to $V(BR)$ for unidirectional types
- ◆ High temperature soldering: 260°C/10s at terminals
- ◆ Plastic package has Underwriters Laboratory Flammability 94V-0
- ◆ For surface mounted applications in order to optimize board space
- ◆ Pb-free plated

<http://www.xihangsemi.com>



Top View

Simplified outline SMA and symbol

Mechanical Data

- ◆ Case: JEDEC DO-214AC. Molded plastic over glass passivated junction
- ◆ Terminals: Solder plated, solderable per MIL-STD-750 Method 2026
- ◆ Polarity: For uni-directional types the band by laser denotes the cathode, which is positive with respect to the anode under normal TVS operation

Device for Bipolar Application

- ◆ For Bidirectional use C or CA Suffix for types SMAJ5.0 thru types SMAJ170 (e.g. SMAJ5.0C , SMAJ170CA)
- ◆ Electrical characteristics apply in both directions

Maximum Ratings and Characteristics



Ratings at 25°C ambient temperature unless otherwise specified

Rating	Symbol	Value	Units
Peak Pulse Power Dissipation on 10/1000us waveform (Note1,2, FIG.1)	P_{PPM}	400	W
Peak Pulse Current on 10/1000us waveform (Note1, FIG.3)	I_{PPM}	SEE TABLE1	A
Peak Forward Surge Current,8.3ms Single Half Sine-Wave Superimposed on Rated Load, (JEDEC Method) (Note2,3)	I_{FSM}	20	A
Operating Junction and Storage Temperature Range	T_J / T_{STG}	-55 to +150	°C

Notes:

1. Non-repetitive current pulse, per Fig.3 and derated above $T_A=25^\circ\text{C}$ per Fig.2.
2. Mounted on 5.0mm x 5.0mm (0.03mm thick) copper pads to each terminal.
3. 8.3ms single half sine-wave, or equivalent square waver, duty cycle=4 pulses per minutes maximum

Part Number Naming Rule and Marking

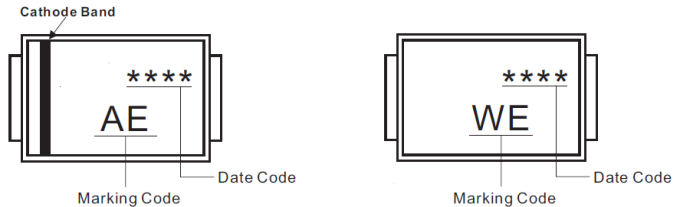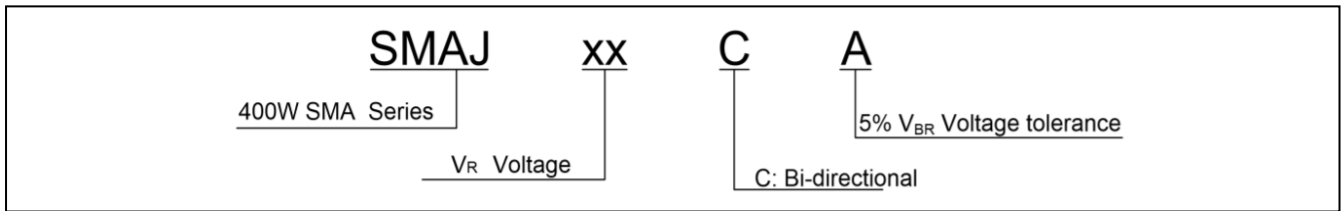

For example: the device marking code of SMAJ5.0A and SMAJ5.0CA are AE and WE respectively.

Electrical Characteristics ($T_a=25^{\circ}\text{C}$, unless otherwise noted)

Table1

Part Number		Marking		V_R	$I_R@V_R$	$V_{BR}@I_T$		I_T	$V_C@I_{PP}$	$I_{PP} (1)$
Uni-Polar	Bi-Polar	Uni	Bi	V	μA	min(V)	max(V)	mA	max(V)	A
SMAJ5.0A	SMAJ5.0CA	AE	WE	5	500	6.4	7	10	9.2	43.5
SMAJ6.0A	SMAJ6.0CA	AG	WG	6	500	6.67	7.37	10	10.3	38.8
SMAJ6.5A	SMAJ6.5CA	AK	WK	6.5	300	7.22	7.98	10	11.2	35.7
SMAJ7.0A	SMAJ7.0CA	AM	WM	7	200	7.78	8.6	10	12	33.3
SMAJ7.5A	SMAJ7.5CA	AP	WP	7.5	100	8.33	9.21	1	12.9	31
SMAJ8.0A	SMAJ8.0CA	AR	WR	8	50	8.89	9.83	1	13.6	29.4
SMAJ8.5A	SMAJ8.5CA	AT	WT	8.5	20	9.44	10.4	1	14.4	27.8
SMAJ9.0A	SMAJ9.0CA	AV	WV	9	10	10	11.1	1	15.4	26
SMAJ10A	SMAJ10CA	AX	WX	10	5	11.1	12.3	1	17	23.5
SMAJ11A	SMAJ11CA	AZ	WZ	11	1	12.2	13.5	1	18.2	22
SMAJ12A	SMAJ12CA	BE	XE	12	1	13.3	14.7	1	19.9	20.1
SMAJ13A	SMAJ13CA	BG	XG	13	1	14.4	15.9	1	21.5	18.6
SMAJ14A	SMAJ14CA	BK	XK	14	1	15.6	17.2	1	23.2	17.2
SMAJ15A	SMAJ15CA	BM	XM	15	1	16.7	18.5	1	24.4	16.4
SMAJ16A	SMAJ16CA	BP	XP	16	1	17.8	19.7	1	26	15.4
SMAJ17A	SMAJ17CA	BR	XR	17	1	18.9	20.9	1	27.6	14.5
SMAJ18A	SMAJ18CA	BT	XT	18	1	20	22.1	1	29.2	13.7
SMAJ20A	SMAJ20CA	BV	XV	20	1	22.2	24.5	1	32.4	12.3
SMAJ22A	SMAJ22CA	BX	XY	22	1	24.4	26.9	1	35.5	11.3

Electrical Characteristics (Ta=25°C, unless otherwise noted)

Table1

Part Number		Marking		V _R	I _R @V _R	V _{BR} @I _T		I _T	V _c @I _{pp}	I _{pp} ⁽¹⁾
Uni-Polar	Bi-Polar	Uni	Bi	V	uA	min(V)	max(V)	mA	max(V)	A
SMAJ24A	SMAJ24CA	BZ	XZ	24	1	26.7	29.5	1	38.9	10.3
SMAJ26A	SMAJ26CA	CE	YE	26	1	28.9	31.9	1	42.1	9.5
SMAJ28A	SMAJ28CA	CG	YG	28	1	31.1	34.4	1	45.4	8.8
SMAJ30A	SMAJ30CA	CK	YK	30	1	33.3	36.8	1	48.4	8.3
SMAJ33A	SMAJ33CA	CM	YM	33	1	36.7	40.6	1	53.3	7.5
SMAJ36A	SMAJ36CA	CP	YP	36	1	40	44.2	1	58.1	6.9
SMAJ40A	SMAJ40CA	CR	YR	40	1	44.4	49.1	1	64.5	6.2
SMAJ43A	SMAJ43CA	CT	YT	43	1	47.8	52.8	1	69.4	5.8
SMAJ45A	SMAJ45CA	CV	YV	45	1	50	55.3	1	72.7	5.5
SMAJ48A	SMAJ48CA	CX	YX	48	1	53.3	58.9	1	77.4	5.2
SMAJ51A	SMAJ51CA	CZ	YZ	51	1	56.7	62.7	1	82.4	4.9
SMAJ54A	SMAJ54CA	RE	ZE	54	1	60	66.3	1	87.1	4.6
SMAJ58A	SMAJ58CA	RG	ZG	58	1	64.4	71.2	1	93.6	4.3
SMAJ60A	SMAJ60CA	RK	ZK	60	1	66.7	73.7	1	96.8	4.1
SMAJ64A	SMAJ64CA	RM	ZM	64	1	71.1	78.6	1	103	3.9
SMAJ70A	SMAJ70CA	RP	ZP	70	1	77.8	86	1	113	3.5
SMAJ75A	SMAJ75CA	RR	ZR	75	1	83.3	92.1	1	121	3.3
SMAJ78A	SMAJ78CA	RT	ZT	78	1	86.7	95.8	1	126	3.2
SMAJ85A	SMAJ85CA	RV	ZV	85	1	94.4	104	1	137	2.9
SMAJ90A	SMAJ90CA	RX	ZX	90	1	100	111	1	146	2.7
SMAJ100A	SMAJ100CA	RZ	ZZ	100	1	111	123	1	162	2.5
SMAJ110A	SMAJ110CA	SE	VE	110	1	122	135	1	177	2.3
SMAJ120A	SMAJ120CA	SG	VG	120	1	133	147	1	193	2.1
SMAJ130A	SMAJ130CA	SK	VK	130	1	144	159	1	209	1.9
SMAJ150A	SMAJ150CA	SM	VM	150	1	167	185	1	243	1.6
SMAJ160A	SMAJ160CA	SP	VP	160	1	178	197	1	259	1.5
SMAJ170A	SMAJ170CA	SR	VR	170	1	189	209	1	275	1.5
SMAJ180A	SMAJ180CA	ST	VT	180	1	201	222	1	292	1.4
SMAJ200A	SMAJ200CA	SV	VV	200	1	224	247	1	324	1.2
SMAJ220A	SMAJ220CA	SX	VX	220	1	246	272	1	356	1.1
SMAJ250A	SMAJ250CA	SZ	VZ	250	1	279	309	1	405	1
SMAJ300A	SMAJ300CA	TE	UE	300	1	335	371	1	486	0.8
SMAJ350A	SMAJ350CA	TG	UG	350	1	391	432	1	567	0.7
SMAJ400A	SMAJ400CA	TK	UK	400	1	447	494	1	648	0.6
SMAJ440A	SMAJ450CA	TM	UM	450	1	492	543	1	713	0.6

(1) Surge waveform: 10/1000us

 V_R: Stand-off voltage—maximum voltage that can be applied

 V_{BR}: Breakdown voltage

V_C : Clamping voltage—peak voltage measured across the suppressor at a specified I_{PP}

I_R : Reverse leakage current

Characteristics curves ($T_A=25^\circ\text{C}$, unless otherwise noted)

Fig.1 Peak Pulse Power Rating Curve

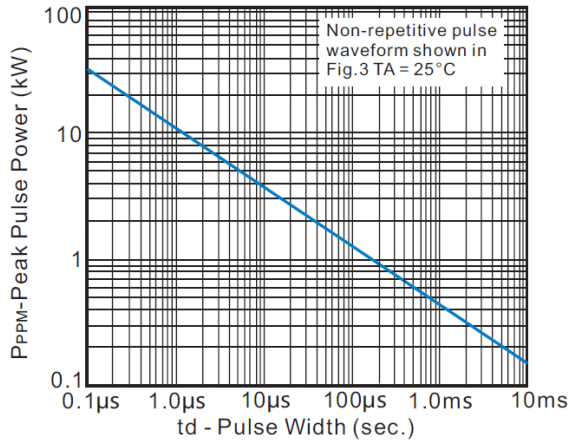


Fig.2 Pulse Derating Curve

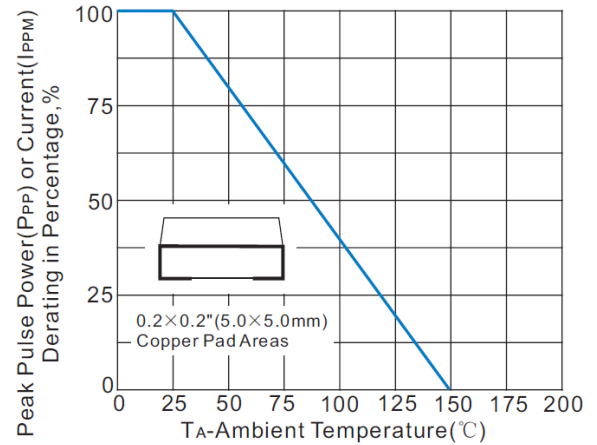


Fig.3 Pulse Waveform

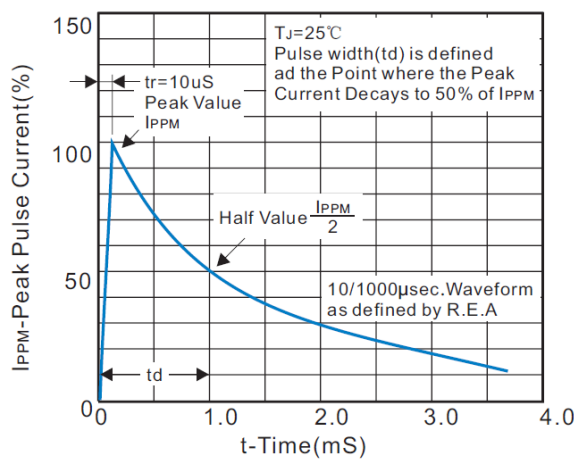


Fig.4 Type Junction Capacitance

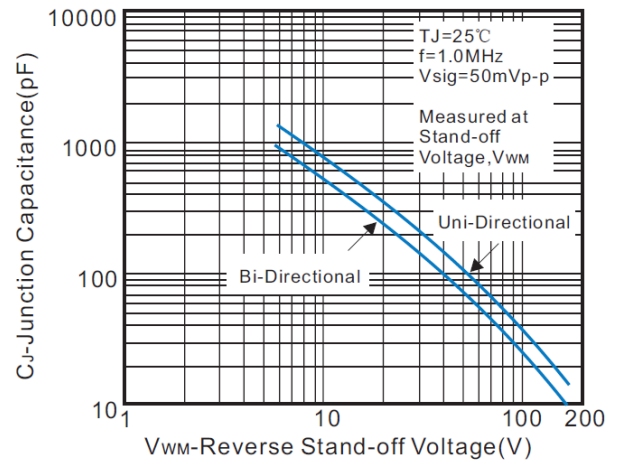


Fig.5 Typ. Transient Thermal Impedance



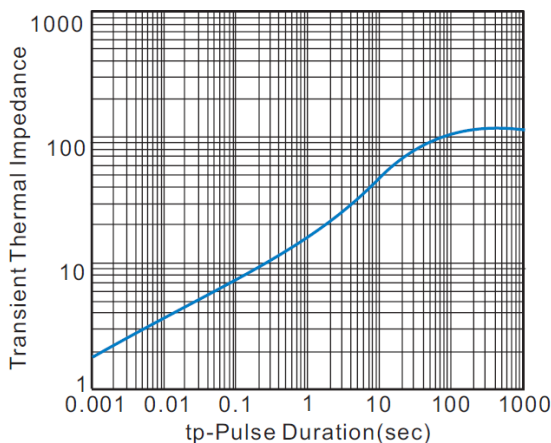


Fig.6 Maximum Non-Repetitive Peak Forward Surge Current Uni-Directional Only

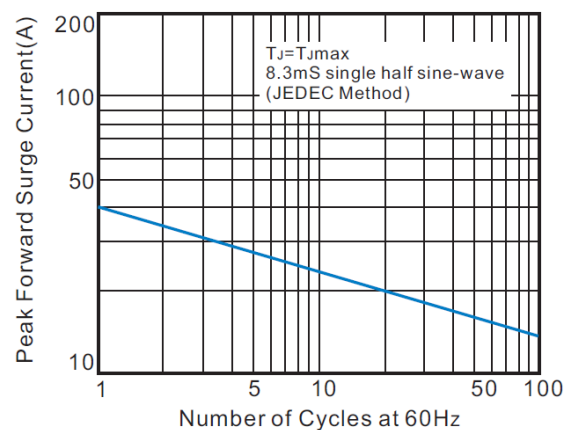



Recommended Soldering Conditions

Reflow Condition		Pb-Free assembly (see figure at right)
Pre Heat	-Temperature Min($T_{S(min)}$)	+150°C
	-Temperature Min($T_{S(max)}$)	+200°C
	-Time(Min to Max)(t_s)	60-180 secs.
Average ramp up rate (Liquidus Temp(T_L) to peak)		3°C/sec.Max
$T_{S(max)}$ to T_L -Ramp-up-Rate		3°C/sec.Max
Reflow	-Temperature(T_L)(Liquidus)	+ 217°C
	- Temperature(t_L)	60-150 secs
Peak Temp(T_p)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_p)		20-40 secs.
Ramp-down Rate		6°C/sec.Max
Time 25°C to Peak Temp (T_p)		8 min.Max
Do not exceed		260°C

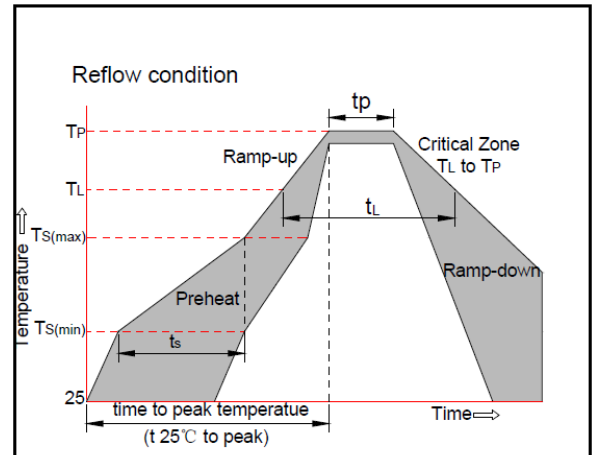

Package Outline Dimensions(DO-214AC)


DO-214AC(SMA J-Bend)

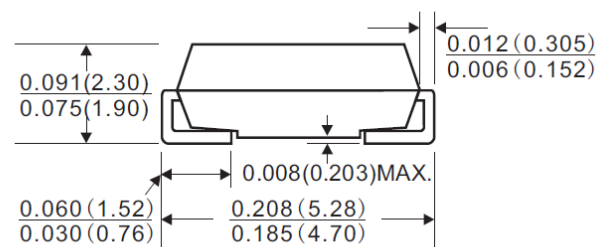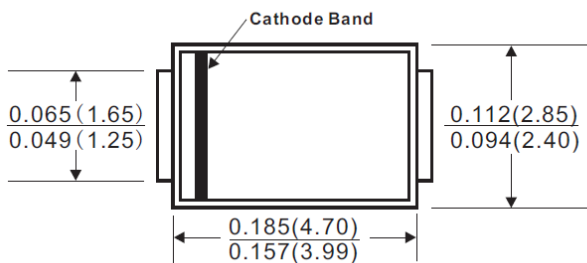

Dimensions in inches and(millimeters)

Tape And Reel Specification

Symbol	Ea Per Reel	REEL DIA(mm)	Industry Standard
SMAJ***	1000/5000	178/330	EIA RS-481

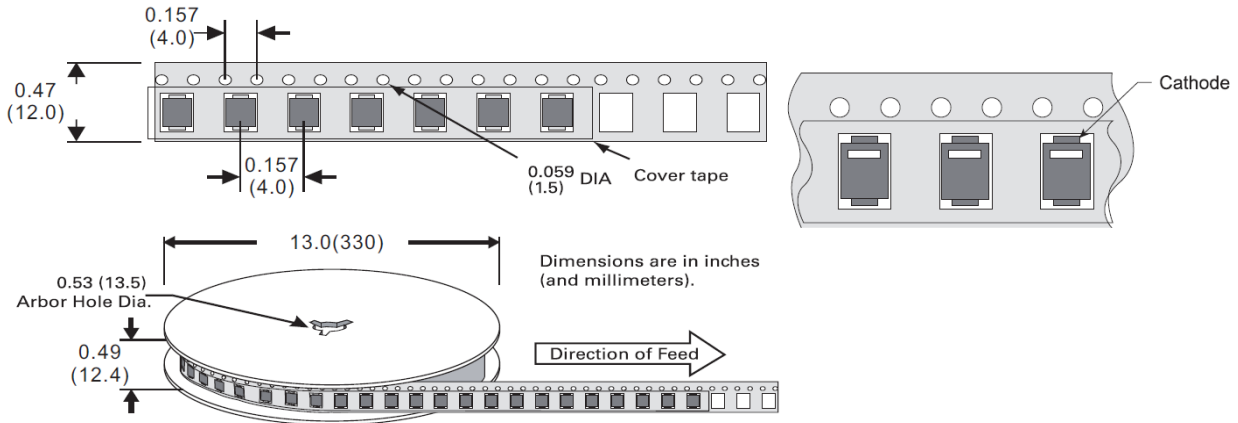

NOTICE

XIHANG's products are not authorized for use as components in any life support device or systems.

XIHANG reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. XIHANG does not assume any liability arising out of the application or use of any product described herein.