

### **Description**

The XT2N4V5B TVS diode is designed to replace multilayer varistors (MLVs) in portable applications such as cell phones, notebooks, and PDA's. It offers superior electrical characteristics such as low clamping voltage, low leakage current and high surge capability. It is designed to protect sensitive electronic components which are connected to power lines, from over-stress caused by ESD (Electrostatic Discharge), EFT (Electrical Fast Transients) and Lighting.

The XT2N4V5B is in a DFN1610-2L package and will protect one bidirectional line. It may be used to provide ESD protection up to  $\pm 30$ kV (Contact and air discharge) according to IEC61000-4-2 , and withstand peak pulse current up to 160A (8/20µs) according to IEC61000-4-5.

#### **Features**

- ♦ Working voltage: 4.5V
- ◆ DFN1610-2L Package
- ◆ 3200 Watts peak pulse power (t<sub>p</sub>=8/20us)
- ◆ Transient protection for data lines to IEC 61000-4-2 (ESD) ±30kV (air), ±30kV (contact)

IEC 61000-4-5 (Surge) 160A (8/20us) IEC61000-4-4(EFT)40A(5/50ns)

- ◆ Low leakage current
- ◆ Low clamping voltage
- Solid-state silicon-avalanche technology


### **Applications**

- Power lines
- Personal digital assistants (PDA's)
- Microprocessors based equipment
- Notebooks, Desktops, and Servers
- ◆ Cell phone Handsets and Accessories
- Portable Electronics
- Peripherals

### http//:www.xihangsemi.com



**DFN1610-2L** 



### **Circuit Diagram**



### Marking

#### **Order Information**


Device	Package	Shipping
XT2N4V5B	DFN1610-2L	3000/Tape&Reel

Rev.1.1 1 www.xihangsemi.com



## **Definitions of electrical characteristics**

Symbol	Parameter	
$V_{RWM}$	Reverse Stand-off Voltage	
I <sub>R</sub>	Reverse Leakage Current @ V <sub>RWM</sub>	
$V_{BR}$	Reverse Breakdown Voltage @ I <sub>T</sub>	
I <sub>R</sub>	Reverse Breakdown Current	
lpp	Reverse Peak Pulse Current	
Vc	Clamping Voltage @ IPP	



## **Absolute Maximum Rating**


Rating	Symbol	Value	Units
Peak Pulse Power ( t <sub>P</sub> = 8/20µS )	P <sub>PK</sub>	3200	W
Peak Pulse Currentr ( t <sub>P</sub> = 8/20µS )	I <sub>pp</sub>	160	А
ESD according to IEC61000-4-2 air discharge	V	±30	kV
ESD according to IEC61000-4-2 contact discharge	$V_{ESD}$	±30	kV
Lead Soldering Temperature	TL	260 (10 sec)	°C
Operating Temperature	T <sub>OP</sub>	-55 to +125	°C
Storage Temperature	Тѕтс	-55 to +150	°C


## Electrical Characteristics (Ta=25℃, unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Тур.	Max.	Units
Reverse Stand-off Voltage	V <sub>RWM</sub>				4.5	V
Reverse Breakdown Voltage	V <sub>BR</sub>	I <sub>T</sub> =1mA	4.6	5.2	6.4	V
Reverse Leakage Current	I <sub>R</sub>	V <sub>RWM</sub> =4.5V			1	μΑ
Clamping Voltage	Vc	I <sub>PP</sub> =50A t <sub>P</sub> = 8/20μs		8.5	11	V
Clamping Voltage	Vc	I <sub>PP</sub> =100A t <sub>P</sub> = 8/20μs		12	14	V
Clamping Voltage	Vc	I <sub>PP</sub> =160A t <sub>P</sub> = 8/20µs		17	20	V
Junction Capacitance	Cj	V <sub>R</sub> =0V f = 1MHz		300	500	pF



## Typical Characteristics (Ta=25℃, unless otherwise noted)






PPP derating in percentage(%)

Pulse Waveform (8/20us)


**Pulse Derating Curve** 



ESD Clamping(8kV Contact Discharge )




# Package Outline Dimensions (DFN1610-2L)

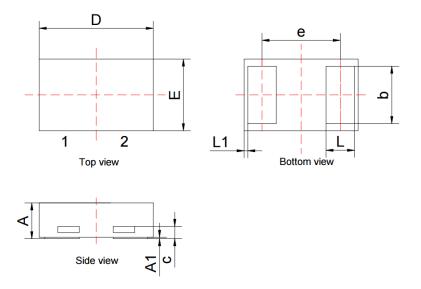

Or week al	Millimeter			
Symbol	Min.	Тур.	Max.	
Α	0.45	0.50	0.55	
A1	0.00	0.02	0.05	
b	0.85	0.90	0.95	
С	0.08	0.12	0.18	
D	1.55	1.60	1.65	
е	1.1BSC			
Е	0.95	1.00	1.05	
L	0.35	0.40	0.45	
L1	0.06BSC			

## Recommend Land Pattern (Unit: mm)





#### Note:

This recommended land pattern is for reference purpose only.



### **Load With Information**



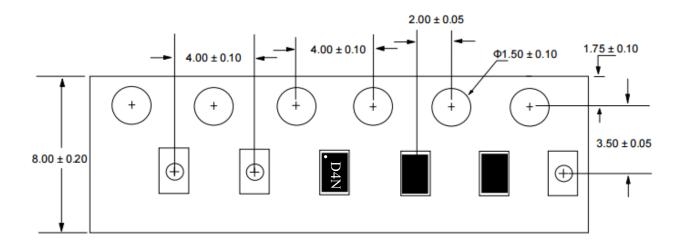

Unit: mm

#### **NOTICE**

XIHANG's products are not authorized for use as components in any life support device or systems.

XIHANG reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. XIHANG does not assume any liability arising out of the application or use of any product described here

Rev.1.1 5 www.xihangsemi.com