


Description

The XE23T5VB is a bi-directional ESD protection diode designed to protect sensitive electronic components which are connected to low speed data lines and control lines from over-stress caused by ESD (Electrostatic Discharge), EFT (Electrical Fast Transients) and Lightning.


The XE23T5VB may be used to provide ESD protection up to $\pm 30\text{kV}$ (contact and air discharge) according to IEC61000-4-2, and withstand peak pulse current up to 15A (8/20 μs) according to IEC61000-4-5.

The XE23T5VB is available in SOT-23 package. Standard products are Pb-free and Halogen-free.


<http://www.xihangsemi.com>



SOT-23

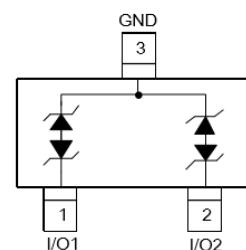

Circuit Diagram

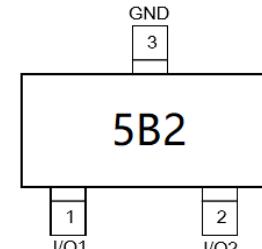

Marking (Top View)

Order Information


Device	Package	Shipping
XE23T5VB	SOT23	3000/Tape&Reel

Applications

- ◆ Set-top box
- ◆ Wireless bus protection
- ◆ Control & monitoring systems
- ◆ Portable electronics
- ◆ Servers, notebook and desktop
- ◆ Cellular handsets and accessories
- ◆ RS-232,RS-422 & RS-485

Definitions of electrical characteristics

Symbol	Parameter
V_{RWM}	Reverse Stand-off Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Reverse Breakdown Voltage @ I_T
I_R	Reverse Breakdown Current
I_{PP}	Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}

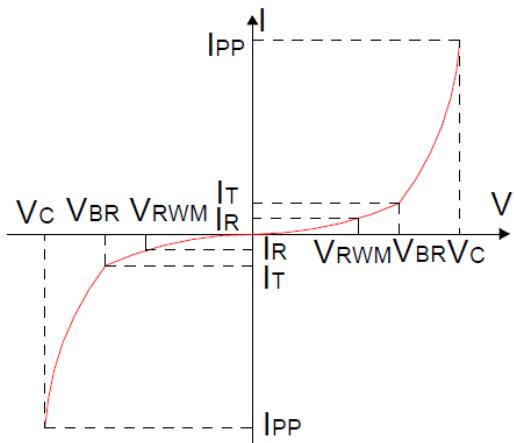

Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power ($t_P = 8/20\mu S$)	P_{PK}	300	W
Peak Pulse Current ($t_P = 8/20\mu S$)	I_{pp}	18	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	± 30	kV
ESD according to IEC61000-4-2 contact discharge		± 30	kV
Lead Soldering Temperature	T_L	260 (10 sec)	°C
Operating Temperature	T_{OP}	-55 to +125	°C
Storage Temperature	T_{STG}	-55 to +150	°C




Electrical Characteristics (Ta=25°C, unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Reverse Stand-off Voltage	V_{RWM}				5	V
Reverse Leakage Current	I_R	$V_{RWM} = 5V$			1	uA
Reverse Breakdown Voltage	V_{BR}	$I_T = 1mA$	6.0			V
Clamping Voltage ¹⁾	V_{CL}	$I_{PP}=1A \quad t_P = 8/20\mu s$			9.8	V
		$I_{PP}=18A \quad t_P = 8/20\mu s$			16.7	V
Junction Capacitance	C_J	$V_R=0V \quad f = 1MHz$		75		pF


Notes:

1)Non-repetitive current pulse, according to IEC61000-4-5.

Typical Characteristics (Ta=25°C, unless otherwise noted)

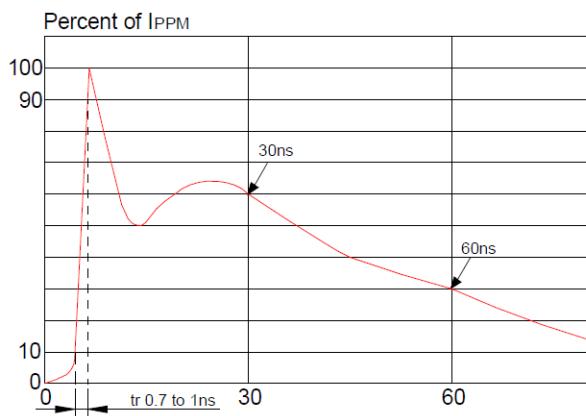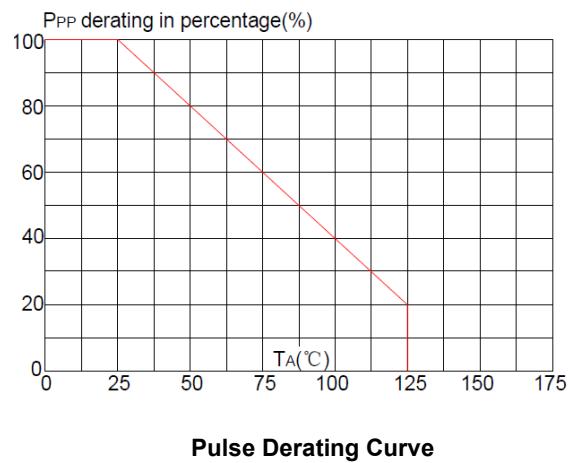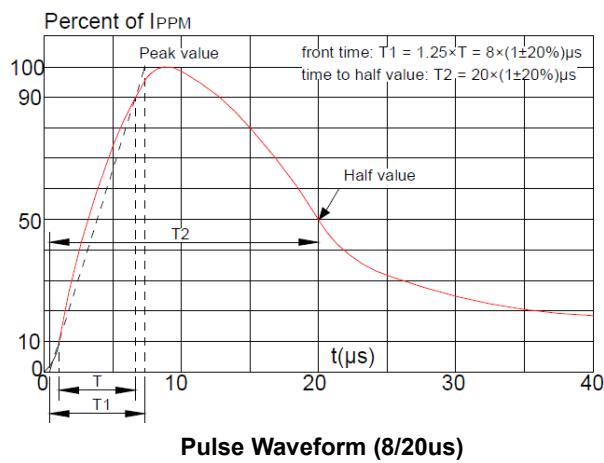


Package Outline Dimensions (SOT-23)

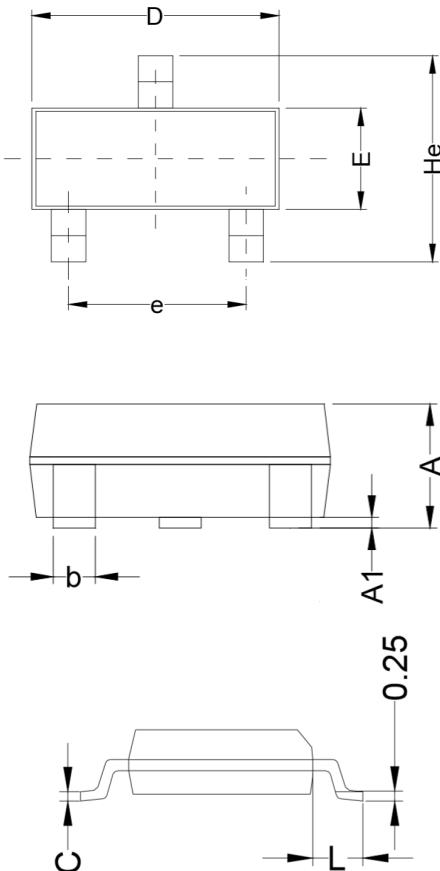

Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.90	1.15	0.035	0.045
A1	0.00	0.10	0.000	0.004
b	0.25	0.325	0.010	0.013
C	0.22	0.25	0.009	0.010
D	2.80	3.00	0.110	0.118
E	1.80	1.90	0.071	0.075
E	1.20	1.40	0.047	0.055
L	0.30	0.50	0.012	0.020
He	2.25	2.25	0.089	0.100
X	0.80		0.031	
X1	0.95		0.037	
Y	0.80		0.031	
Z	2.02		0.080	

Recommend Land Pattern (Unit: mm)

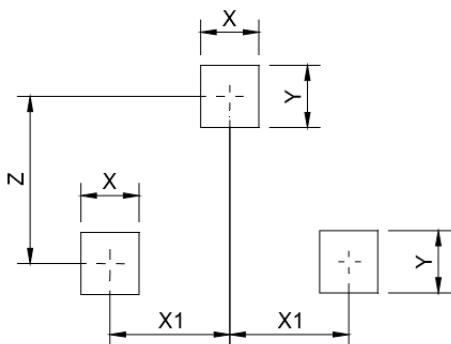

Note: This recommended land pattern is for reference purpose only.

NOTICE

Xi Hang's products are not authorized for use as components in any life support device or systems.

Xi Hang reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Xi Hang does not assume any liability arising out of the application or use of any product described herein.